


APPLY TACK ON
GRINDED PAVEMENT
SURFACE. SURFACE
COURSE SHALL BE PG
64-16 ARHM-GG-C, OR
AS APPROVED.

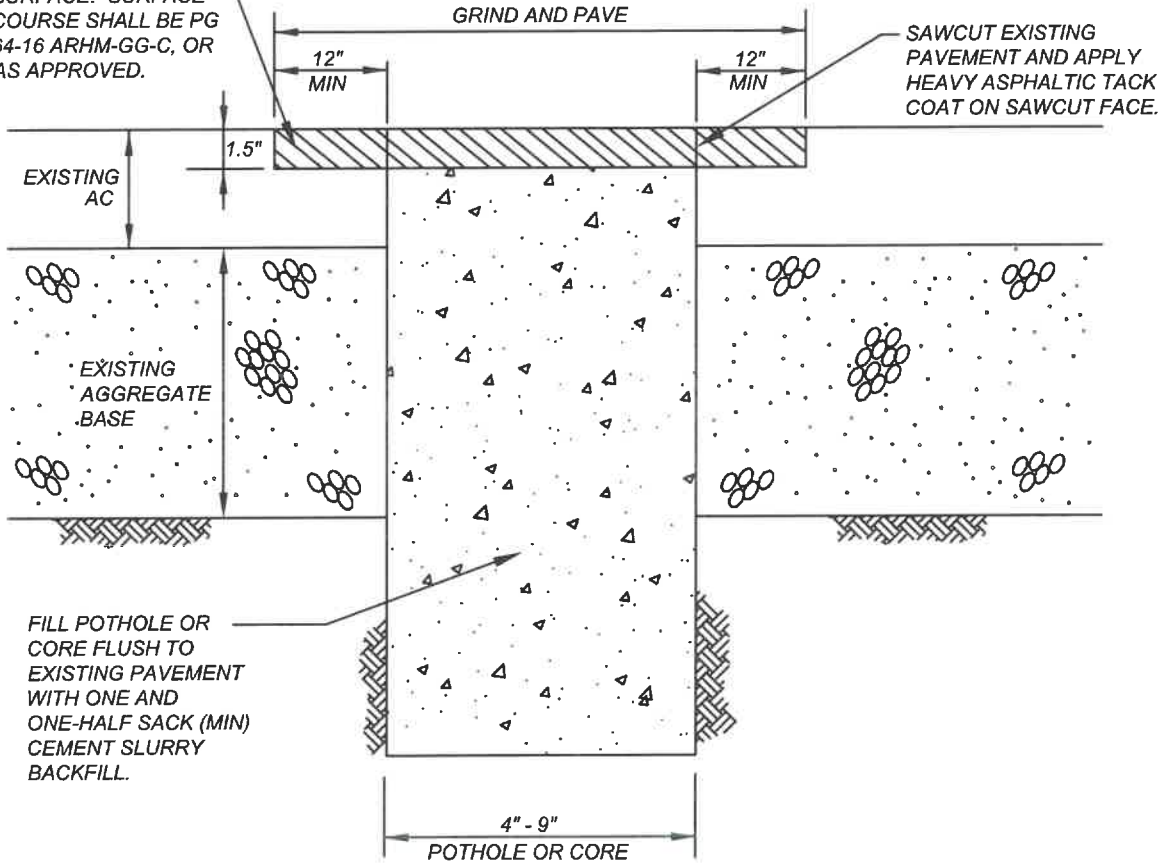

NOTE:

- 1.) SEE TRENCH BACKFILL AND ROADWAY REPAIR NOTES STD No MVSI-132C.
2. WHEN MULTIPLE POTHOLES SPACED 24" OR LESS ARE RUN PARALLEL TO THE TRAFFIC LANE, STANDARD PLAN MVSI-132B SHALL BE USED.

NOT TO SCALE

	RECOMMENDED: <i>Melissa Walker</i> 5/22/12 DIVISION MANAGER DATE	<h2 style="margin: 0;">CITY OF MORENO VALLEY</h2> <p style="margin: 0;">PUBLIC WORKS DEPARTMENT - CAPITAL PROJECTS DIVISION</p>	STANDARD PLAN <h3 style="margin: 0;">MVSI-132D-1</h3>
	APPROVED: <i>[Signature]</i> 3/21/12 PUBLIC WORKS DIRECTOR / DATE CITY ENGINEER	<h3 style="margin: 0;">UTILITY POTHOLE OR PAVEMENT CORE REPAIR</h3>	